


180° ROTATION LIMB SHEARS - 6-14" (16-36cm)

Versatility In The Air - Without Using Bucket Trucks and Chain Saws!

Dymax 180° Rotation Limb Shears for excavators are ideal for 5 -25T excavators. A sleek narrow frame design allows these shears to maneuver in tight, hard-to-reach locations. With 180° of hydraulic rotation your machine can reach any limb, anytime.

- 6" (16cm), 10" (25cm), 14" (36cm) cut capacity models available.
- AR400 machined cutting knife system.
- 180° hydraulic rotation, 90° left and right.
- Provided with electro-hydraulic diverter valve kit.

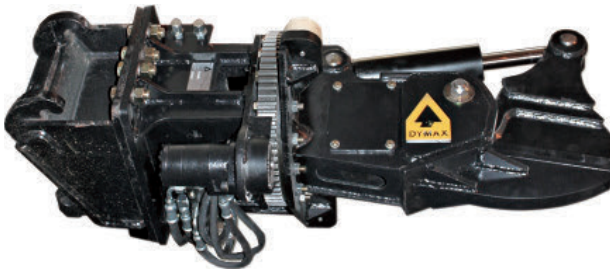

DX-TS-RLS-6in-HX Model
6in (16cm) model
for 5-8T excavators
3,000psi cylinder ram.



DX-TS-RLS-14in-HX Model
14in (36cm) model
for 15-20T excavators
4,500 psi cylinder ram.



DX-TS-RLS-10in-HX Model
10in (25cm) model
for 11-14T excavators
3,000 psi cylinder ram.

MODELS, SPECS AND HYDRAULICS

Model #	Description/Max Shearing Diameter (in - cm)	Weight lb	Weight kg
DX-TS-RLS-6in-HX-5T	Tree Shear, Limb Shear, 180° rotation (6in - 15.24cm)	540	245
DX-TS-RLS-6in-HX-7T	Tree Shear, Limb Shear, 180° rotation (6in - 15.24cm)	540	245
DX-TS-RLS-6in-HX-8T	Tree Shear, Limb Shear, 180° rotation (6in - 15.24cm)	540	245
DX-TS-RLS-10in-HX-11T	Tree Shear, Limb Shear, 180° rotation (10in - 25.40cm)	1200	544
DX-TS-RLS-10in-HX-12T	Tree Shear, Limb Shear, 180° rotation (10in - 25.40cm)	1200	544
DX-TS-RLS-10in-HX-13T	Tree Shear, Limb Shear, 180° rotation (10in - 25.40cm)	1200	544
DX-TS-RLS-10in-HX-14T	Tree Shear, Limb Shear, 180° rotation (10in - 25.40cm)	1200	544
DX-TS-RLS-14in-HX-14T	Tree Shear, Limb Shear, 180° rotation (14in - 35.56cm)	2100	953
DX-TS-RLS-14in-HX-16T	Tree Shear, Limb Shear, 180° rotation (14in - 35.56cm)	2100	953
DX-TS-RLS-14in-HX-18T	Tree Shear, Limb Shear, 180° rotation (14in - 35.56cm)	2100	953
DX-TS-RLS-14in-HX-20T	Tree Shear, Limb Shear, 180° rotation (14in - 35.56cm)	2100	953

Models require bi-directional (two-way) flow valve arrangement and lines group on excavator main pump. Dymax provides an electro-hydraulic diverter valve kit for operating the rotation positioning. The electro-hydraulic diverter valve kit requires installation of wire, switch, and fuse.

PLS 303



Dymax Limb Shear doing what it does best: making short work of limbs and trees.